

Product Information Bulletin

MERCURY LAMPS



Features and Benefits

- Long life
- Low initial costs
- Clear and coated lamp types
- Moderate color rendering
- Good efficiency
- Universal operating positions

MERCURY VAPOR lamps are designed primarily for use in general lighting applications where good efficiency and long life are desired with moderate color rendering requirements.

Available in a wide range of lamp types from 75-1000 watts, in both clear and coated configurations, Mercury vapor lamps are ideal for a variety of lighting applications. PAR lamps offer floodlighting and ultra-violet spectra for special lighting applications.

Product Availability

Wattage	Bulb Shapes	Finish
75	E17	Coated
100	E17, ET23.5	Coated
100	PAR38, R40	—
175	ED28, R40	Clear, Coated
250	ED28	Coated
400	ED37	Clear, Coated
1000	BT56	Coated

System Comparison

69449 versus 64490 and 67533

Lamp Type	Description	Average Rated Life (hrs.)	Initial Lumens	Mean Lumens	CRI
Mercury Vapor	H33CD-400	24,000	20,000	18,700	22
Metalarc	M400/U	20,000	36,000	23,500	65
Lumalux	LU400/ECO	24,000	50,000	45,000	22

Application Information

Applications

Parking lots
Street and area lighting
Security lighting
Industrial areas
Commercial applications
Outdoor facades

Fixtures

Contact your local fixture agent for available fixtures.

Ballast Information

Lamps are approved for use on systems meeting the respective ANSI standard.

Application Notes

1. Lamps can be operated in open or enclosed fixtures.
2. All lamps can be operated universally.



Sample Specification

Lamp(s) shall be (a) Mercury Vapor lamp(s) and shall be operated in any position.

Ordering and Specification Information

Item Number	Ordering Abbreviation	Watts	Bulb	Base	ANSI Spec. No.	Avg. Rated Life (hrs.)	Initial Lumens	Mean Lumens	CCT	CRI	Beam Angle
69402	H43AV-75/DX	75	E17	Medium	H43	16,000	2700	1800	4300K	45	
69403	H38AV-100/DX	100	E17	Medium	H38	18,000	4000	3560	4000K	45	
69408	H38JA-100/DX	100	ET23.5	Mogul	H38	24,000	4100	3300	4000K	45	
68843	H44GS-100SP	100	PAR38	Admed. Skirt	H44	16,000	2500	1950	5900K	20	8°
68846	H44JM-100/MDSK	100	PAR38	Med. Skirt	H44	16,000	2500	1950	5900K	20	8°
69405	H38BP-100/DX	100	R40	Medium	H38	24,000	2500	2000	4000K	45	
69444	H39KB-175	175	ED28	Mogul	H39	24,000	7700	7150	5900K	22	
69445	H39KC-175/DX	175	ED28	Mogul	H39	24,000	8400	6800	4000K	45	
69406	H39BP-175/DX	175	R40	Medium	H39	24,000	5100	4100	4000K	45	
69448	H37KC-250/DX	250	ED28	Mogul	H37	24,000	12,500	10,000	4000K	45	
69449	H33CD-400	400	ED37	Mogul	H33	24,000	20,000	18,700	5900K	22	
69450	H33GL-400/DX	400	ED37	Mogul	H33	24,000	23,000	16,200	4000K	43	
69331	H36GW-1000/DX	1000	BT56	Mogul	H36	24,000	58,000	48,500	4000K	45	


Note:

1. Rated life shows mean lumens measured at 50% of rated life.

Ordering Guide


H Mercury Vapor	38AV Ballast designation	100 Wattage: 75, 100 175, 250, 400 and 1000 watts	/	Finish __ = Clear DX = Coated
---------------------------	------------------------------------	--	---	--

Dimensions

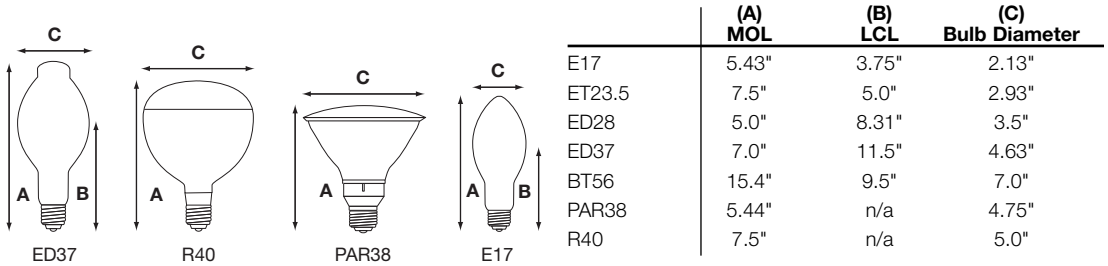


Technical Information


Typical Lumen Maintenance Curve

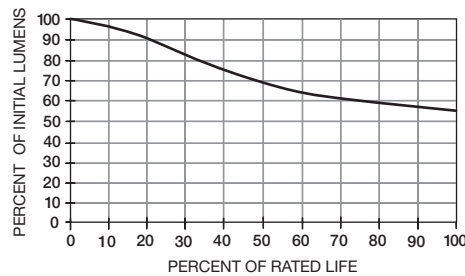

Typical Mortality Curve

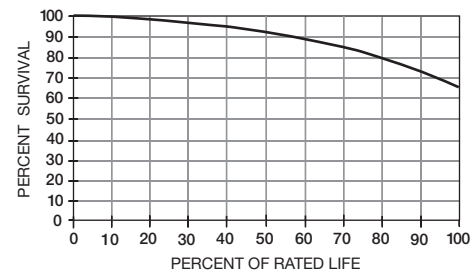

Typical Candlepower Distribution

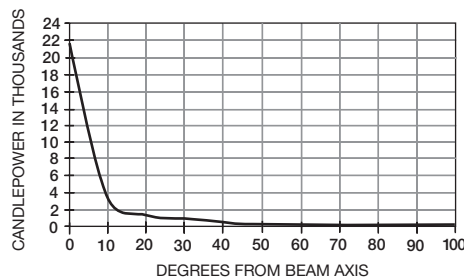

OSRAM SYLVANIA
National Customer
Service and Sales Center
18725 N. Union Street
Westfield, IN 46074

Industrial & Commercial

Phone: 1-800-255-5042
Fax: 1-800-255-5043

National Accounts

Phone: 1-800-562-4671
Fax: 1-800-562-4674

OEM/Specialty Markets

Phone: 1-800-762-7191
Fax: 1-800-762-7192

Display/Optic

Phone: 1-888-677-2627
Fax: 1-800-762-7192

In Canada
OSRAM SYLVANIA LTD.
Headquarters
2001 Drew Road
Mississauga, ON L5S 1S4

Industrial & Commercial

Phone: 1-800-263-2852
Fax: 1-800-667-6772

Special Markets

Phone: 1-800-265-2852
Fax: 1-800-667-6772