

Product Information Bulletin

SYLVANIA RHINOCOAT SAFELINE®



- Extra protection and safety
- Moisture resistant - Ideal for porch or post lamp
- Great for outdoors
- Choose from a variety of shapes
- Most with Rough Service filament
- Ideal for use in food preparation areas
- Also available in unique GT 19 chimney shape

SAFELINE - Tough enough for life's bumps and knocks

SYLVANIA RhinoCoat Safeline Bulbs have a tough silicone coating which helps prevent breakage. This coating also holds the glass together, keeping it from shattering.

You can use this bulb from the basement to the attic in every place you want to be protected from broken glass.

With the moisture-resistant RhinoCoat Safeline, coating the use outside in the porch or post lamps is a preferable application.

In the A-line shape, choose from 40, 50, 60, 75 and 100 watt bulbs. The BR and PS shape is available as well as the unique chimney shape lamp in a clear (discontinued) and a frosted version.

Product Availability

| Bulb Shapes | Wattage |
|-------------|---------|
| A 15 | 40 |
| A 19 | 50, 60 |
| A 21 | 75, 100 |
| BR 30 | 65 |
| GT 19 | 75 |
| PS 25 | 150 |
| PS 30 | 200 |

Application Information

Applications

Children's room

Nursery

Porch

As Post Lamp

Garages

Basements and attics

Utility light

Closets

Bathrooms and kitchens

Sample Specification

Lamp(s) shall be (a) SYLVANIA Rhinocoat Safeline lamp(s) with a _____ (clear or inside frost) finish. Lamp(s) shall have a _____ (A15, A19, A21, PS25, PS35, BR30 or GT19) bulb shape and with a _____ (750, 1000, 2000 or 4000) hour average rated life.


Ordering Specifications

| Item # | Ordering Abbreviation | Watts | Bulb | Base | Avg. Rated Life | Volt | Package Qty. | Finish | Mount |
|--------|-----------------------|-------|------|--------------|-----------------|------|--------------|------------------------------|--------|
| 10082 | 40A15/SL | 40 | A15 | Medium | 1000 | 120 | 120 | Frosted - Appliance | C, C-9 |
| 11118 | 50A/SL | 50 | A19 | Medium | 1000 | 120 | 12 | Inside Frost | C, C-9 |
| 10503 | 60A/RS/SL/RP | 60 | A19 | Medium | 1000 | 120 | 12 | Inside Frost - Rough Service | C, C-9 |
| 15167 | 65BR30/FL/SL/RP | 65 | BR30 | Medium | 2000 | 130 | 6 | Inside Frost | C, C-6 |
| 12554 | 75A21/RS/SL/RP | 75 | A21 | Medium | 1000 | 120 | 12 | Inside Frost - Rough Service | C, C-9 |
| 14758 | 75SCH/SL/RP | 75 | GT19 | Medium | 4000 | 120 | 12 | Frosted | C, C-9 |
| 12834 | 100A21/SL | 100 | A21 | Medium Brass | 750 | 120 | 48 | Inside Frost | C, C-8 |
| 12992 | 100A21/RS/SL/RP | 100 | A21 | Medium Brass | 1000 | 120 | 24 | Inside Frost - Rough Service | C, C-9 |
| 15293 | 150PS25/SL | 150 | PS25 | Medium Brass | 1000 | 120 | 60 | Inside Frost | C, C-9 |
| 15300 | 150PS25/RS/SL | 150 | PS25 | Medium Brass | 1000 | 120 | 60 | Inside Frost - Rough Service | C, C-9 |
| 15648 | 200PS/SL | 200 | PS30 | Medium Brass | 1000 | 120 | 60 | Inside Frost | C, C-9 |
| 15687 | 200PS/23/SL | 200 | PS30 | Medium Brass | 1000 | 120 | 60 | Inside Frost - Rough Service | C, C-9 |

Discontinued Items

| Old Naed | New Item # | Old Ordering Abbreviation | Watts | Bulb | Base | Avg. Rated Life | Volt | Finish |
|----------|------------|---------------------------|-------|------|--------------|-----------------|------|----------------------|
| 10501 | 10503 | 60A/SL | 60 | A19 | Medium | 1000 | 120 | Inside Frost |
| 10502 | 10503 | 60A/SL/RP | 60 | A19 | Medium | 1000 | 120 | Inside Frost |
| 12567 | 12554 | 75A/SL/RP | 75 | A21 | Medium | 1000 | 120 | Inside Frost |
| 12555 | 12554 | 75A21/RS/SL | 75 | A21 | Medium | 1000 | 120 | Inside Frost - Rough |
| 12996 | 12834 | 100A21/SL/RP | 100 | A21 | Medium Brass | 750 | 120 | Inside Frost |
| 12982 | 12992 | 100A21/RS/SL | 100 | A21 | Medium Brass | 1000 | 120 | Inside Frost - Rough |
| 15112 | 15167 | 75R30/SL/RP | 75 | R30 | Medium | 200 | 130 | Inside frost |
| 14757 | 14758 | 75SCH/SL/RP | 75 | GT19 | Medium | 4000 | 120 | Clear |

Dimensions

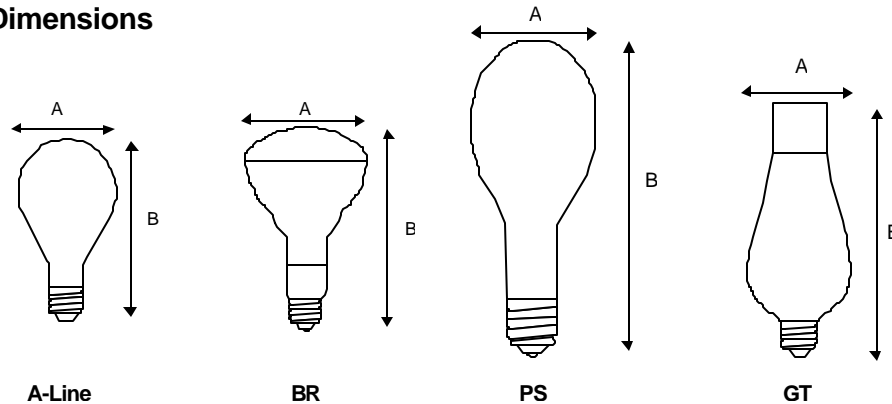

| Bulb Shape | (A) MOL | (B) LCL | Diameter |
|------------|---------|---------|----------|
| A15 | 3 1/2 | 2 7/8 | 1 1/4 |
| 50A19 | 4 7/16 | 2 1/2 | 2 3/8 |
| 60A19 | 4 7/16 | 3 1/8 | 2 3/8 |
| A21 | 5 5/16 | 3 7/8 | 2 5/8 |
| BR30 | 5 3/8 | N/A | 3 3/4 |
| GT19 | 5 3/4 | N/A | 2 3/8 |
| PS25 | 6 15/16 | 5 1/4 | 3 1/8 |
| PS30 | 8 1/16 | 6 | 3 3/4 |

SRAM SYLVANIA
National Customer
Support Center
18725 N. Union Street
Westfield, IN 46074

Industrial & Commercial

Phone: 1-800-255-5042
Fax: 1-800-255-5043

National Accounts

Phone: 1-800-562-4671
Fax: 1-800-562-4674

Special Markets

Phone: 1-800-762-7191
Fax: 1-800-762-7192

In Canada
OSRAM SYLVANIA LTD.
Headquarters
2001 Drew Road
Mississauga, ON L5S 1S4

Industrial & Commercial

Phone: 1-800-263-2852
Fax: 1-800-667-6772

Special Markets

Phone: 1-800-265-2852
Fax: 1-800-667-6772

Ordering Guide

| 50 | A19 | /RS | /SL | /RP |
|---------|------------|---------------|----------|-------------|
| Wattage | Bulb Shape | Rough Service | Safeline | Retail Pack |

Visit our website:
www.sylvania.com

